



LLIR01 **Smart** Universal Remote (IR Blaster)













access









Specifications

Input Voltage: 5V, 1A recommended IR beam angle: 90° along vertical axis Wireless Standard: Wifi 802.11 b/g/n 2.4GHz

Control Method: APP/ Voice control


Housing Material: ABS Working humidity: <80%

Indicator

Operating temperature: -40°C-85°C Dimensions: 68mm dia x 27mm height

Net weight:

Product Overview

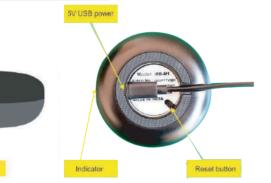

Installing the App

1. Please scan the QR code below to download the "Lifelong Smart" Home App.



- 2. If you don't have an app account, you can choose to register using an email address.
- 3. Go to the registration page, then click on "Get Verification Code" and enter it.
- 4. Set your password and click "OK" to register.





Add Device

- 1. Make sure your mobile phone is connected to Wifi. Power up the IR Blaster.
- 2. In the Lifelong Smart App home page, tap the icon "+" on the top right corner or click the "Add Device" button (Fig. 1)
- 3. Select "Add Manually" from the top carousel (Fig. 2)

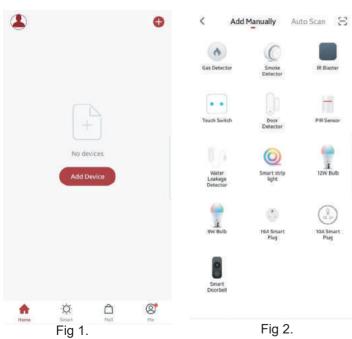


Fig 2.

4. Select "IR Blaster". This will take you to the device detection page (Fig. 3)



Fig 3.

5. Reset the device by pressing the reset button for more than 3 seconds. The blue indicator should then start blinking. Follow steps on the app. Press the "Confirm indicator rapidly blink" button (Fig 3-5.)





Fig 4. Fig 5.

6. In the next screen, enter your Wifi name and password (Fig 6.)

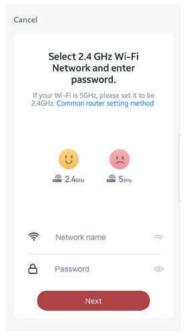


Fig 6.

7

7. The device will get connected automatically and you will be taken to the Device screen in the App.

Done

0

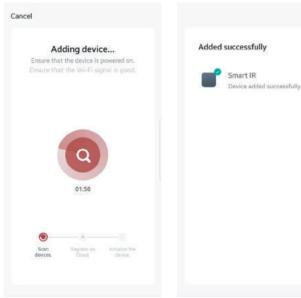


Fig 7. Fig 8.

8. By default, the name of the device will be "Smart IR". You can edit it to any suitable name (Fig 8.)

9. Your device is now connected and ready to use (Fig. 9)

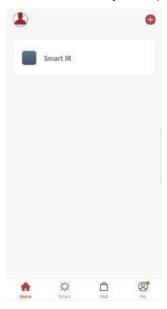


Fig 9.

Add New Remote

- 1. To add new remote, click (+) (Fig 10)
- 2. Select category of remote to add. Eg. Select "TV" to add your TV remote and select brand of TV from the list in next page (Fig 11)



Fig 10.



Fig 11.

3. Check if the selected TV model is working, if not, press "Next one" on bottom right and once you find the right remote control, press the option "Select this one". The TV will be added in the Device list. (Fig. 12)



Fig 12.

- 4. Click the device in the list to operate the remote control for that particular device (Fig. 13)
- 5. To teach remote codes, select DIY (Fig. 14)





Fig 13.

Fig 14.

- 6. Select device category (Fig. 15)
- 7. Aim the remote control to IR blaster (Fig. 16)
- 8. Press "Next step" (Fig. 17)

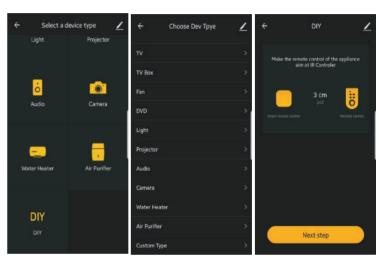


Fig 15.

Fig 16.

Fig 17.

- Press the button on the remote control aiming it at the IR blaster (Fig. 18)
- 10. "Detected signal" notification will pop-up when the code is learned successfully. Name the code with the button name and press OK (Fig. 19)
- 11.To learn more buttons, press "Continue" and repeat same steps (Fig 20)

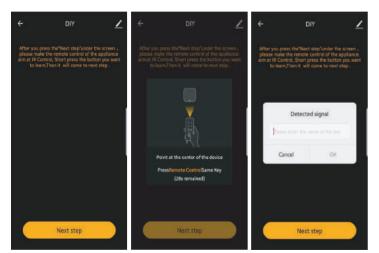


Fig 18. Fig 19. Fig 20.

- 12. All the learned buttons will be listed. Once finished press "Save". (Fig 21)
- 13. The new learned remote will be listed in the IR Blaster device list. (Fig 22)

If your remote control is not in the database, you can teach your remorse codes to the IR blaster. In order to do that, in "Add remote control", scroll down and select DIY. Select the category of the remote and follow steps as in Fig 13-22

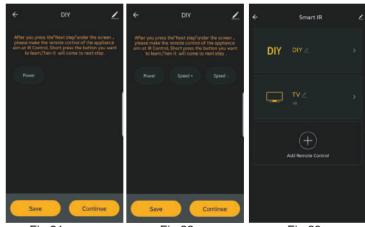


Fig 21. Fig 22. Fig 23.

Binding Amazon Alexa

- 1. You can connect your device to Amazon Alexa easily by Amazon Alexa app.
- 2. Navigate to the "Skills & Games" menu in Alexa app.
- 3. Press search and enter "Lifelong Smart". In the results click "Lifelong Smart Home". This will take you to the Lifelong Smart Skills page (Fig. A).
- 4. Click "Enable to use" (Fig. B). You will then need to enter your Lifelong Smart account login details and press "Link Now" (Fig. D).
- 5. In a few seconds your account will be linked to Alexa skills and a success notification is presented. Press "Close".
- Press "Discover Devices" in the Alexa app. You should now see "IR Blaster" listed in Alexa.


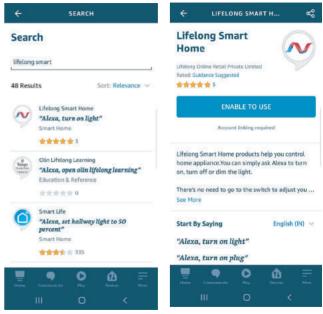


Fig A.

Fig B.

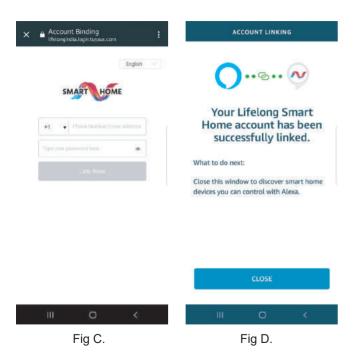

Binding Amazon Alexa

To control your device using Alexa, it is recommended to connect it to an Amazon Echo device. Echo needs to discover your device first. To discover, you can say "Alexa, discover device". If the device has already been discovered during Alexa setup as described above, this step can be omitted.

To control your device with voice commands, you can use following commands (assuming you have devices named Set Top Box, TV and AC added to IR Blaster) -

- 1. Alexa, switch on Set Top Box.
- 2. Alexa, increase volume of Set Top Box.
- 3. Alexa, decrease volume of Set Top Box.
- 4. Alexa, change Set Top Box channel to Zee TV.
- 5. Alexa, switch off Set Top Box.
- 6. Alexa, switch on TV.
- 7. Alexa, switch off TV.
- 8. Alexa, switch on AC.
- 9. Alexa, increase AC temperature by 3 degrees.
- 10. Alexa, increase AC temperature by 1 degree.
- 11. Alexa, set AC temperature to 25 degrees.

Consumer Warranty Card

Dear Customer,

Thank you for choosing a Lifelong consumer product. All Lifelong Consumer products are designed and manufactured to the highest standards to deliver high quality performance, as well as easy installation and use. At Lifelong, we believe in providing not only service, but adding value to your purchase. The warranty has therefore been designed especially for you with your interest at heart.

Warranty Service

them date of purchame of the production Model:	uct:
Warranty coverag	e: 1 year
	hase receipt is necessary for warranty verification. ustomercare@lifelongindia.com
Address: Home Number: Office Number:	ils
Purchase Date: - Invoice Number: -	

Please log onto to www.lifelongindiaonline.com and complete the online warranty form with your personal and product details within 14 days.

Terms and Conditions:

- 1.This warranty is void if:
 - The completely filled warranty card is not presented at the time of servicing the product.
 - b. The product is not operated according to the instructions given under the user manual.
 - C. Damages are caused by lightning, abnormal voltage, water or other liquid intrusion, fire, flood, accident, neglicence or improper handling.
 - d. Product has been damaged due to installation, repairs, alterations or modifications by unauthorized service organizations or persons.
 - e. Product label specifying the model number, serial number and production code has been removed and altered.
 - Defects or parts requiring replacement due to ordinary wear and tear, corrosion, rust or stains, scratches, dents on the casing or paintwork of the product.
 - g. Claims damaged and/or missing parts (accessories) after 7 days from the original date of goods received.
 - h. Defects or faults in product which have been used for commercial/industrial purposes or which have been rented/leased or have been otherwise subject to non-household/non-domestic use.
- Repairs or replacements will be carried out by authorized service provider.
- During the limited warranty period, Lifelong or its authorized service provider will repair without charge the defective unit inclusive of labor and parts and restore the unit to its optimum working condition. All defective parts used for the warranty repair should be surrendered to Lifelona and/or its authorised servicer.
- All expenses incurred in collecting the unit (s) or part(s) thereof from authorised service provider as will as any other expenses and incidentals will be borne by the consumer.

- 5. Lifelong obligations are limited to the repair and replacement of the defective product. Except as set forth above, there are no other express or implied warranty and all warrantied, conditions or other terms implied by statute or common law (including any warranty of satisfactory quality, merchantability or fitness for a particular purpose) are excluded to the fullest extent permitted by the lass.
- 6. Lifelong total liability for damages relating to or arising out of the purchase or use of the product regardless of the type or cause of such damage of the form of characterization of the claim asserted (e.g. contract or tor) shall not exceed the original purchase price paid for the product.
- 7. However in no event shall Lifelong and Lifelong authorized distributors be liable for any punitive, special incidental, indirect or consequential losses or damages whatsoever (including without limitation, damages for the loss of revenue, business, profits, goodwill, or contracts, business interruptions, loss of business information or any other pecuniary loss.) Whether or not Lifelong has been advised of the possibility of such damages. These limitations shall apply not with standing the failure of the essential purpose of any limited warranty. This limited warranty does not affect consumer's statutory rights under the law.
- No carrier, dealer or employee is thereof authorized to make modifications to this warranty and you should not reply on any such representation. Lifelong reserves the right to amend the terms and conditions if necessary.

Manufactured for & Marketed by : **Lifelong Online Retail Private Limited**

For queries and complaints: please contact: customercare@lifelongindia.com www.lifelongindiaonline.com